

Miller RA40/ Permanent Roof Anchor

Description

The Miller RA40/ Permanent Roof Anchor is designed to provide fall protection on rooftops. The anchor can be applied during new construction or retrofitted into the design of finished roofs with asphalt shingles, shakes or tiles. The RA40/ is nailed securely across the ridge opening and the roof is finished, overtop of the RA40/, with the roofing materials and ridge vent. Only the D-rings are left exposed for a quick and safe connection.



Materials

Stamping: Type 304 stainless steel
(20 gauge - .035 in.)

D-Rings: Zinc plated steel
Nails: 8 - Galvanized steel (16d)

*Must be used in conjunction with a shock-absorbing lanyard that will limit fall arrest forces to 900 lbs.

Technical


Weight: 1.50 lbs. (0.68 kg)
Max Working Load: 310 lbs. (140.62 kg)

Certification

Meets all OSHA 1926.502 requirements.

Ideal for use on residential roofs for the following:

- Gutter cleaning
- Window/Skylight Cleaning
- Trimming tree limbs
- Chimney cleaning
- Storm clean-up/repair
- Re-roofing/Re-shingle

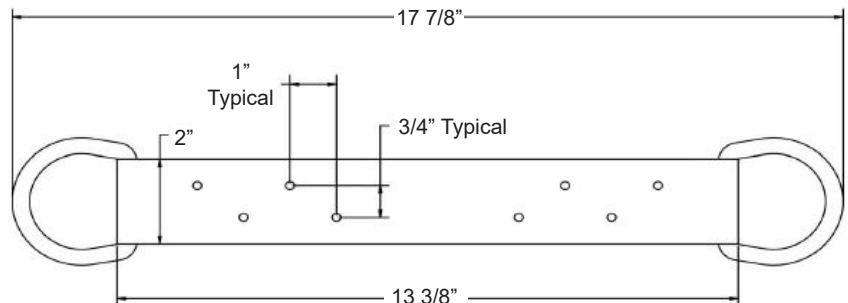

Limitless Possibilities. Ask the Expert.

Technical Service: 800.873.5242
www.millerfallprotection.com

Honeywell Industrial Safety

900 Douglas Pike
Smithfield, RI 02917

USA

Phone: 800.430.5490
Fax: 800.322.1330

Canada

Phone: 888.212.7233
Fax: 888.667.8477

⚠ This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.